


imageRUNNER C1225/C1225iF

Productive and cost effective A4 colour multifunctionals

These feature rich A4 colour multifunctional devices, provide fast and efficient document handling 'out of the box' so you can focus on your business priorities

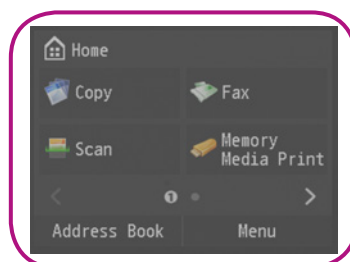

- Powerful A4 colour multifunctional devices with print, copy, colour scan, send and fax¹ functionality, ideal for demanding small businesses
- Simple and user friendly operation with the 8.9 cm colour touch and swipe LCD display
- Canon's V² colour (Vivid and Vibrant) imaging technology ensures documents impress and stand out from the rest
- Seamlessly fit into your office environment with network connectivity and supporting IT standards such as PCL¹ and Genuine Adobe PS¹
- Increase productivity with up to 1,100 sheet capacity and a Duplex Automatic Document Feeder (DADF)
- Scan and Send documents directly to a variety of destinations including email and shared folder
- Flexible mobile printing and scanning capabilities such as Apple AirPrint™, Mopria printing as well as mobile printing and scanning apps, support mobile worker efficiency
- Out of the box easy install; users can access the set-up guide via the user interface
- Consumables can be changed easily reducing down-time
- Standard toner included in the box giving up to 12 months colour printing²
- Giving you peace of mind with Canon's standard warranty¹
- Extended language support for function menus, print drivers and labels, gives users the possibility to navigate in their own language³
- Energy consumption as little as 1 watt in sleep mode
- Compact and efficient space saving design



PRINT



COPY



FAX



SCAN

AirPrint™ and the AirPrint logo are trademarks of Apple Inc.

¹imageRUNNER C1225iF only

²Actual results will vary and may be higher or lower than 12 months depending on individual usage. 12 months colour printing is based on a monthly print volume of 1,000 pages, 30% colour pages and 5% A4 coverage (ISO/IEC 24712). Standard Black toner yield is 12,000 pages. Yellow, Magenta and Cyan toner yield is 7,300 pages

³The imageRUNNER C1225/iF are localised in all standard European languages as well as

Russian, Turkish, Arabic, Polish, Hungarian, Czech and Slovak. However, Arabic UI is not supported

Canon

Technical Specifications

imageRUNNER C1225/C1225iF

Machine type

Available core functions

Colour A4 Laser Multifunctional (Reader / Printer standard)
Print, Copy, Scan, Send and Fax standard for C1225iF
Fax not available for C1225

Printer Specifications

Print speed (BW/Colour)

25/25ppm (A4 Single-sided), 26/26ppm (A5 Single-sided),
25/25ppm (A4 Double-sided), 26/26ppm (A5 Double-sided)

Print method

Colour Laser Beam Printing

Print resolution

2400 dpi equivalent x 600 dpi, 600 dpi x 600 dpi

Double sided printing

Automatic (Standard)

Direct print

Direct printing available from USB memory key
Supported file types: JPEG, TIFF, PDF

Printing from mobiles or internet-connected devices and cloud-based services

A range of software is available to provide printing from mobile or internet-connected devices. Please contact your sales representative for further information.

Paper input (Standard)

1 x 550-sheet (80 gsm) cassette, 100-sheet (80 gsm) multi-purpose tray

Paper input (Option)

1 x 550-sheet cassette (80 gsm) (Cassette Feeding Unit-AJ1)

Maximum paper input capacity

1200 sheets (80 gsm)

Paper output capacity

250 sheets (80 gsm)

Finishing capabilities

Standard: Collate, Group

Supported media types

Cassette/s:
Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Envelopes*
*Envelope support via standard cassette 1 only.

Multi-purpose tray:

Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Transparency, Labels, Envelopes (No.10 (COM10), Monarch, ISO-C5, DL)

Paper cassette 1:

Standard size: A4, A5, B5, Legal, Letter, Executive, Statement, Envelopes (No.10 (COM10), Monarch, DL)
Custom size (98.4 mm to 216 mm X 190.5 mm to 355.6 mm)

Paper cassettes 2:

Standard size: A4, A5, B5, Legal, Letter, Executive, Statement
Custom size (98.4 mm to 216 mm X 190.5 mm to 355.6 mm)

Multi-purpose tray:

Standard size: A4, A5, B5, Legal, Letter, Executive, Statement, Envelopes (No.10 (COM10), Monarch, ISO-C5, DL)

Supported media sizes

Cassette/s : 60 to 163 gsm

Multi-purpose tray: 60 to 220 gsm

Duplex: 60 to 163 gsm

Supported media weights

Page Description Language(s)

UFRII, PCL5c/6, Adobe PostScript Level 3 (Standard for C1225iF)
PCL5c/6, Adobe PostScript Level 3 not available for C1225

Fonts

PCL fonts: 93 Roman, 10 Bitmap, 2 OCR fonts
PS fonts: 136 Roman fonts
PS/PCL not available for C1225

Operating System compatibility

UFRII: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008R2 / Windows 8 / Windows 8.1 / Server 2012 / Server 2012R2, MAC OS X (10.5.8 or later)

PCL: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008 R2 / Windows 8 / Windows 8.1 / Server 2012 / Server 2012R2

PS: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008 R2 / Windows 8 / Windows 8.1 / Server 2012 / Server 2012R2, MAC OS X (10.5.8 or later)

PPD: MAC OS 9.1 or later, MAC OS X (10.3.9 or later), Windows XP / Windows Vista / Windows 7 / Windows 8 / Windows 8.1

Please refer to <http://software.canon-europe.com/> for availability of print solutions for other operating systems and environments including AS/400, UNIX, Linux and Citrix. Some of these solutions are chargeable.
SAP Device Types are available via the SAP Market Place.

Copy Specifications

Copy speed (BW/Colour)

Please refer to the quoted print speeds

First Copy Output Time (FCOT) (BW/Colour)

8.4 sec / 10.5 sec

Copy resolution

Reading: 600 dpi x 600 dpi

Printing: 600 dpi x 600 dpi

Multiple copy

Up to 999 copies

Reduction/Enlargement

Zoom: 25 - 400 % in 1 % increments

Fixed Zoom Ratio: 25%, 50%, 70%, 100%, 141%, 200%, 400%

Scan Specifications

Optional/Standard

Standard on all models (DADF 50 sheets)

Supported media size/s

A4, A5, B5, Custom sizes: 140 mm to 216 mm x 128 mm to 356 mm (when fed through the DADF)

Supported media weight/s

Single-sided scanning: 50 to 105 gsm (DADF)
Double-sided scanning: 64 to 105 gsm (DADF)

Scan resolution

BW Scan: 100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi, 200 dpi x 400 dpi, 400 dpi, 600 dpi

CL Scan: 100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi
2-sided to 2-sided (Automatic)

Double sided scanning

Scan speed

BW single-sided: 25 ipm (A4, 300 dpi X 300 dpi),

BW double-sided: 9 ipm (A4, 300 dpi X 300 dpi)

CL single-sided: 25 ipm (A4, 300 dpi X 300 dpi),

CL double-sided: 9 ipm (A4, 300 dpi X 300 dpi)

Scan methods

Push Scan: Colour Send functionality is standard.

Pull Scan: TWAIN/WIA Pull scanning available on all models.

Scan to USB Memory Key: Available on all models

Scan to mobiles, internet-connected devices: A range of solutions is available to provide scanning to mobile devices, internet-connected devices depending on your requirements. Please contact your sales representative for further information.

Pull scan specifications

TWAIN/WIA Pull scanning

Windows XP

Windows Vista/Windows 7/Windows 8/Windows 8.1

Mac Scan (TWAIN only)

Mac OS X 10.5.8 or later

*The drivers are available via <http://software.canon-europe.com>.

Send Specifications

Optional/Standard

Standard on all models

Send resolution

100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi,

200 dpi x 400 dpi, 400 dpi, 600 dpi

Destinations

E-Mail, Fax (not available for C1225), PC (SMB, FTP)

Address Book/Speed dials

LDAP (Max. 50 searchable),

Local (Max. 300 including 281 Speed dials)

File formats

SMB : JPEG, TIFF, PDF, Compact PDF, Searchable PDF

E-mail : PDF, Compact PDF, Searchable PDF

Optional Universal Send Feature Sets

Send PDF Security Feature Set-E1@E: Send encrypted PDF and add digital device signature to PDF files.

Fax Specifications

Optional/Standard

Standard for C1225iF

Not available for C1225

Modem speed

Super G3 33.6 kbps (Up to 3 seconds per page¹)

Fax resolution

Standard: 200 x 100 dpi

Fine: 200 x 200 dpi

Super fine: 200 x 400 dpi

Ultra fine: 400 x 400 dpi

Fax memory

Up to 512 pages¹

Speed dials

Max. 281

Group dials / destinations

Max. 199 dials

Sequential broadcast

Max. 310 addresses

Memory backup

Yes

Other features

Fax Forwarding, Dual Access, PC Fax (TX only)

General Specifications

Warm-up time

Approx. 34 seconds from power ON

Recovery from sleep mode

10 seconds or less

Interface type

USB 2.0 Hi-Speed, 1000BaseT / 100Base-TX / 10Base-T, 1 x USB Host (Front), 1 x USB Host (Rear), 1 x USB device
Recommended third party wireless solution is Silex SX-BR-4600 WAN. For more details please refer to www.sillex-europe.com

Network protocols

TCP/IP* (LPD / Port 9100 / WSD / IPP / IPPS / SMB / FTP),

IPX/SPX (NDS, Bindery)

*IPv4/IPv6 support

Memory

1.0 GB

Control panel

QVGA Color LCD 8.9 cm (3.5 inch) touch / swipe supported display

Dimensions (W x D x H)

Standard:

511 mm x 549 mm x 610 mm

Optional:

With Cassette Feeding Unit-AJ1: 511 mm x 549 mm x 1035 mm

Installation space (W x D)

852 mm x 843 mm

(Main unit + Multi-purpose tray open + Cassette drawers open)

Weight

Approx. 44 kg including toner

Operating environment

Temperature: 10 to 30°C (50 to 86°F)

Humidity: 20 to 80 % RH (no condensation)

Power source

220 - 240 V (±10 %), 50/60 Hz (±2 Hz), 3.7 Amp

Power consumption

Maximum: Approx. 1.5 kW

Standby: Approx. 30 W

Sleep mode: Approx. 1.0 W or less²

Time to put the device to sleep mode : 60 sec

Typical Electricity Consumption (TEC) rating³: 0.8 kWh

Only for C1225 (non Fax model)

Plugin-off: 0.5W or less (Normal mode)

Time to put the device to plugin-off: 4 hours

Technical Specifications

Noise levels
Sound Pressure ⁴
(reference data, LpAm, Bystander's position)
Software and printer management

Security features

Consumables

Toner bottle

Sound Pressure Noise Levels:
 Active: 50 dB
 Standby: Inaudible (Less than 30dB)

eMaintenance: embedded RDS allows remote eMaintenance services such as meter capture, automatic consumables management and remote diagnostics.

Remote Firmware System (GDLS):

Allows the remote distribution of firmware.

Remote User Interface (RUI): Web-based interface to each device that helps to provide remote device management and control.

Canon Driver Configuration Tool: A utility for changing the factory default settings of Canon print drivers

Standard:
 IP/Mac Address Filtering, IPSEC, SNMP V3.0, IEEE 802.1X, Secured Print, Department ID
 Optional: Send PDF Security Feature Set-E1@E

Toner 34 Black / Cyan / Magenta / Yellow Toner
 (Yield: BK 12,000 / CMY 7,300 pages) ⁵

Specifications for options

Cassette feeding unit

Name: Cassette Feeding Unit-AJ1
 Description: Optional cassette feeding unit with 1 x 550 sheets paper capacity. Takes the cassette paper capacity up to 1,200 sheets.

Dimensions (W x D x H): 511 mm x 508 mm x 425 mm
 Weight: Approx. 15 kg

HANDSET-J1 EUR/HANDSET-J1 SA

BARCODE PRINTING KIT-D1@E: Enables barcode printing via jet caps technology.

Send PDF Security Feature Set-E1@E: Send encrypted PDF and add digital device signature to PDF files.

Drum Unit 034 (BK / C / M / Y)
 Waste Toner Box WT-A3:

Hardware accessories 1

Print controller accessories

Document security accessories

Other options

Footnotes

¹Based on ITU-T Standard Chart No. 1


²1 watt sleep mode may not be possible in all circumstances. Certain network configurations and options may prevent the device from entering deep sleep mode. Please refer to the user guide for more information

³Typical Electricity Consumption (TEC) rating represents the typical electricity consumed by a product during 1 week, measured in kilowatt-hours (kWh). The test methodology is defined by Energy Star (<http://www.eu-energystar.org>).

⁴Declared noise emission in accordance with ISO 7779

⁵Based on 5% coverage (A4)

All specifications subject to change without notice

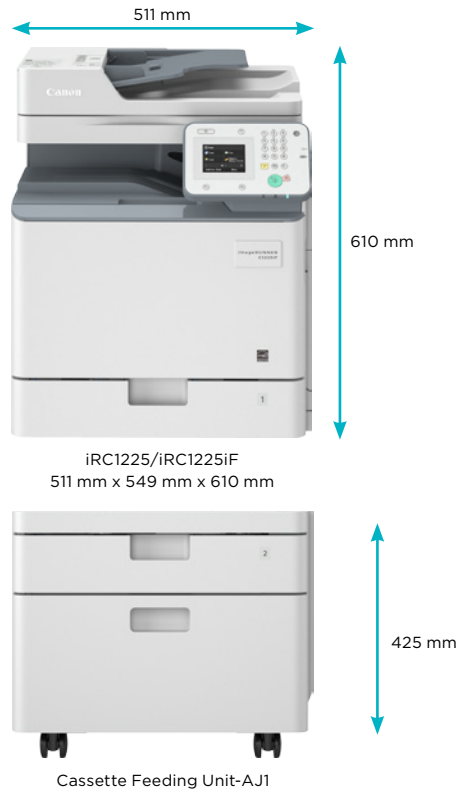

C1225iF only



C1225iF only



C1225iF only



C1225iF only



C1225iF only

Canon Inc.
 canon.com
 Canon Europe
 canon-europe.com
 English edition
 © Canon Europa N.V., 2014

Canon (UK) Ltd
 Woodhatch
 Reigate
 Surrey RH2 8BF
 Telephone no 01737 220000
 Facsimile 01737 220022
 canon.co.uk

Canon Ireland
 3006 Lake Drive
 Citywest, Saggart
 Co.Dublin, Ireland
 Telephone No: 01 2052400
 Facsimile No: 01 2052525
 canon.ie

